SIEMENS

Gigaset A580 - A585

Gigaset

Issued by
Gigaset Communications GmbH
Schlavenhorst 66, D-46395 Bocholt
Gigaset Communications GmbH is a trademark licensee of Siemens AG

© Gigaset Communications GmbH 2008
All rights reserved.
Subject to availability. Rights of modifications reserved.

www.gigaset.com

The handset at a glance

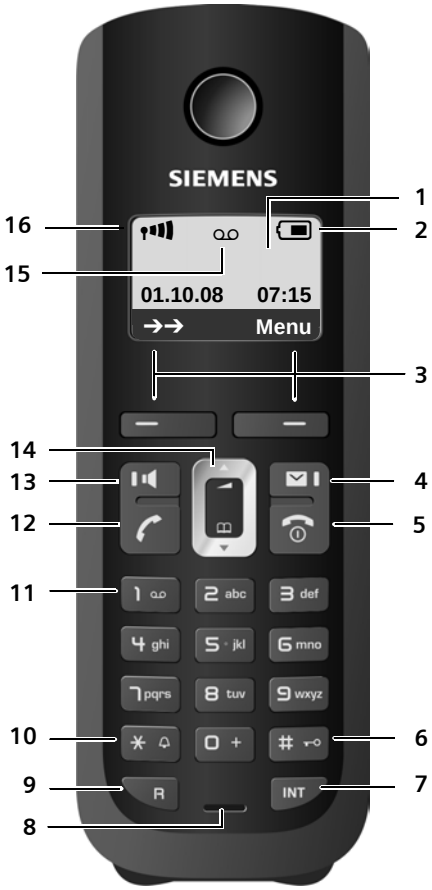

1 **Display** in idle status (example)
2 **Charge status of the batteries**(➔ page 11)
3 **Display keys** (➔ page 17)
4 **Message key** (➔ page 27)

Access to calls and message lists;
Flashes: new message or new call
5 **End call key, On/Off key**
End call, cancel function, go back one menu level (press briefly), back to idle status (press and hold), activate/deactivate handset (press and hold in idle status)
6 **Hash key**
Keypad lock on/off (press and hold in idle status);
toggle between upper/lower case and digits
7 **Internal key**
Make an internal call (➔ page 42)
8 **Microphone**
9 **Recall key** (➔ page 48)
- Recall (flash)
- Insert a dialling pause (press and hold)
10 **Star key**
Ringer tones on/off (press and hold),
With an existing connection:
Switch between dial pulsing/touch tone dialling (press briefly)
11 **Key 1** (➔ page 39)
Dial answer machine (A585 only)/ network mailbox (press and hold)
12 **Talk key**
Answer a call, open last number redial list (press briefly), start dialling (press and hold)
When writing an SMS: send SMS
13 **Handsfree key**
Switch between earpiece and handsfree mode;
Lights up: handsfree activated
Flashes: incoming call
14 **Control key** (➔ page 17)
15 **Answer machine icon** (A585 only)
Answer machine switched on;
Flashes: Answer machine is recording a message or is being operated by another internal party
16 **Signal strength** (➔ page 11)

Gigaset contact numbers:

For personal advice on our range of products and for repairs or guarantee/warranty claims call:

Service Centre UK: 08453 6708 12
(local call cost charge)

Please have your proof of purchase ready when calling.

The base station at a glance

You can use the keys on the base station to register handsets to the base station, search for handsets (paging), ➜ page 42 and operate the integrated answer machine (Gigaset A585 only).

Gigaset A585 base station

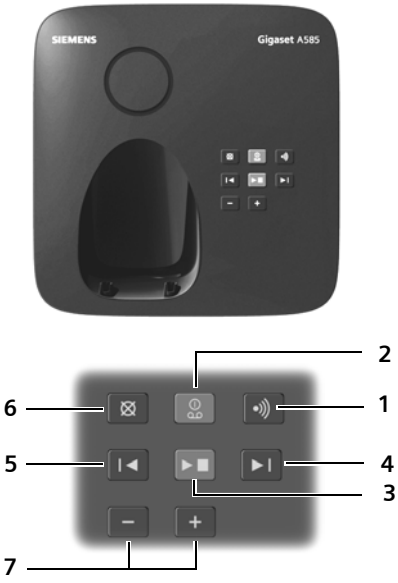

1 **Registration/paging key:**
Press **briefly**: Search for handsets (paging), ➜ page 42.
Press and **hold**: Register handsets and DECT devices, ➜ page 41.

2 **On/Off key**: Activate/deactivate answer machine.
LED lights up: Answer machine is activated.
LED flashes: The answer machine is recording a new message.

During message playback:

3 **Play/Stop key:**
Play back new messages from answer machine or cancel the playback (press **briefly**).
Play back new and old messages (press and **hold**).
LED flashes: At least one new message is present.
LED flickers: Memory is full.

4 Skip to next message (press once) or next message but one (press twice).

5 Skip back to beginning of message (press once) or to previous message (press twice).

6 Delete current message.

7 Adjust volume during message playback: [−] = quieter; [+] = louder.
While an external call is being signalled: adjust ringer tone volume.

Please note:

- If the answer machine is being operated from a handset or if it is recording a message, it cannot be operated from the base station.
- If the LED flashes although the answer machine is switched off, it means that there is still at least one new message that has not been played back yet.

Gigaset A580 base station

Registration/Paging key:
– Press **briefly**: Search for handsets (paging), ➜ page 42.
– Press and **hold**: Register handsets and DECT devices, ➜ page 41.

Contents

The handset at a glance 1
The base station at a glance 2
Safety precautions 6
First steps 7
Check the package contents 7
Setting up the base station and charging cradle (if included) 8
Connecting the base station 8
Connecting the charging cradle (if included) 9
Setting up the handset for use 10
What would you like to do next? 16
Using the phone 17
Control key 17
Display keys 17
Keys on the keypad 18
Correcting incorrect entries 18
Menu guidance 18
Activating/deactivating the handset 19
Activating/deactivating the keypad lock 19
Illustration of operating steps in the user guide 20
Menu tree 21
Making calls 23
Making an external call 23
Ending a call 23
Answering a call 23
Calling Line Identification 23
Handsfree talking 24
Muting 24
Using the directory and lists 25
Directory 25
Last number redial list 27
Opening lists with the message key 27
Making cost-effective calls 29
Automatic network provider code (preselection) 29
Displaying the call duration 30
SMS (text messages) 31
Writing/sending an SMS 31
Receiving an SMS 32
Setting SMS centres 33
SMS on a PABX 33
Activating/deactivating SMS function 34
SMS troubleshooting 34

Operating the answer machine of the Gigaset A585 base station 35
Operation via the handset 35
Activating/deactivating call screening 37
Setting up the answer machine 37
Resetting fast access for the answer machine using key 1 37
Operating when on the move (remote operation) 38

Using the network mailbox 39
Configuring fast access for the network mailbox 39
Viewing the network mailbox report 39

ECO DECT 40

Setting the alarm clock 41

Using several handsets 41
Registering handsets 41
De-registering handsets 42
Locating a handset ("paging") 42
Making internal calls 42
Listening in to an external call (conference) 43

Handset settings 43
Changing date and time 43
Changing the display language 43
Setting the display 44
Activating/deactivating auto answer 44
Changing the handsfree/earpiece volume 44
Changing ringer tones 44
Advisory tones 45
Restoring the handset to the factory settings 45

Base station settings 46
Protecting against unauthorised access 46
Changing ringer tones 46
Repeater support 46
Restoring the base station to the factory settings 46

Connecting the phone to a PABX 48
Dialling modes and recall 48
Setting pauses 48
Switching temporarily to touch tone dialling (DTMF) 48

Service (Customer Care) 49
Questions and answers 49
Authorisation 50
Guarantee Certificate United Kingdom 50

Environment **51**

Appendix **52**
Care 52
Contact with liquid 52
Specifications 52
Writing and editing text 54

Accessories **55**

Mounting the base station to the wall **58**

Mounting the charging cradle to the wall **58**

Index **59**

Safety precautions

Warning

Read the safety precautions and the user guide before use.

Explain their contents and the potential hazards associated with using the telephone to your children.

Only use the mains adapter supplied, as indicated on the underside of the base station or charging cradle.

Only use the **recommended, rechargeable batteries** (➔ page 52), i.e. never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury.

The operation of medical appliances may be affected. Be aware of the technical conditions in your particular environment, e.g. doctor's surgery.

Do not hold the rear of the handset to your ear when it is ringing or when the handsfree function is activated. Otherwise you risk serious and permanent damage to your hearing.

The handset may cause an unpleasant humming noise in hearing aids.

Do not install the base station or charging cradle in bathrooms or shower rooms. The base station and charging cradle are not splash proof (➔ page 52).

Do not use your phone in environments with a potential explosion hazard (e.g. paint shops).

If you give your Gigaset to someone else, make sure you also give them the user guide.

Please remove faulty base stations from use or have them repaired by our service, as they could interfere with other wireless services.

Please note

Not all of the functions described in this user guide are available in all countries.

First steps

Check the package contents

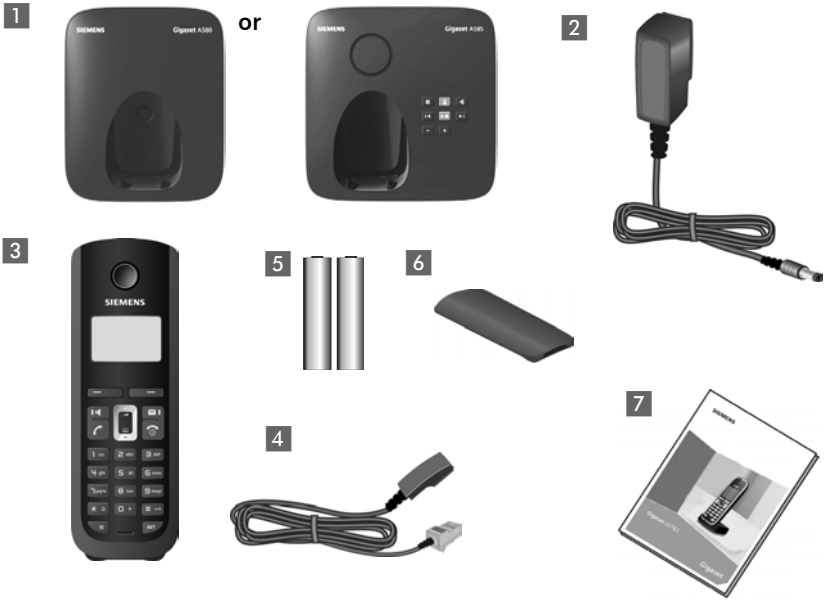

1 one Gigaset A580/A585 base station,
2 one mains adapter,
3 one Gigaset A58H handset,
4 one phone cord,
5 two batteries,
6 one battery cover,
7 one user guide.

If you have purchased a **model with multiple handsets** the package should contain two batteries, a battery cover and a charging cradle 8 with mains adapter 9 for each additional handset.

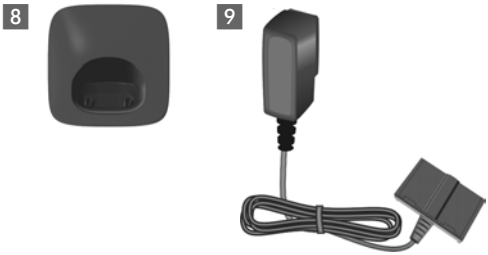

Setting up the base station and charging cradle (if included)

The base station and charging cradle are designed for use in enclosed dry rooms with a temperature range of +5 °C to +45 °C.

- Set up the base station and charging cradles at a central location on a flat, non-slip surface in your house or apartment.

Please note

Pay attention to the range of the base station.
This is up to 300 m in unobstructed outdoor areas and up to 50 m inside buildings. The range is reduced when Eco Mode (➔ page 40) is activated.

The phone's feet do not usually leave any marks on surfaces. However, due to the multitude of different varnishes and polishes used on today's furnishings, the occurrence of marks on the surfaces cannot be completely ruled out.

Instructions on how to mount the base station and charging cradle to a wall, see ➔ page 58.

Please note:

- Never expose the telephone to the influence of heat sources, direct sunlight or other electrical devices.
- Protect your Gigaset from moisture, dust, corrosive liquids and vapours.

Connecting the base station

- **First** connect the mains adapter 1.
- **Then** connect the telephone jack 2 and insert the cables into the cableducts.

Please note:

- The mains adapter must **always be connected**, as the phone will not operate without mains connection.
- Only use the mains adapter and phone cord **supplied**. Pin connections on telephone cables can vary (pin connections ➔ page 53).

Connecting the charging cradle (if included)

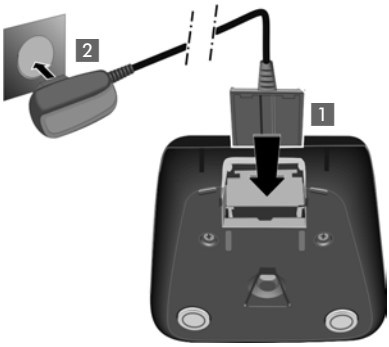

- Connect the flat plug of the mains adapter 1.
- Plug the mains adapter into the plug socket 2.

If you need to disconnect the plug from the charging cradle, press the release button 1 and disconnect the plug 2.



Setting up the handset for use

The display is protected by a plastic film.
Please remove the protective film!

Inserting the batteries and closing the battery cover

Warning

Use only the rechargeable batteries recommended by Gigaset Communications GmbH * (➔ page 52). Never use a conventional (non-rechargeable) battery or other battery types as this could result in significant health risks and personal injury. For example, the batteries could explode. The phone could also malfunction or be damaged as a result of using batteries that are not of the recommended type.

* Gigaset Communications GmbH is a trademark licensee of Siemens AG.

- Insert the batteries the right way round.
  The polarity is indicated in/on the battery compartment.

- First insert the battery cover at the top ⓐ.
- Then press the cover ⓑ until it clicks into place.

If you need to open the battery cover, for instance to replace the batteries, place your fingertip in the cavity on the casing and pull the battery cover upwards.

Placing the handset in the base station and registering

Before you can use the phone, you must first register the handset to the base station.

▶ Place the handset with the **display facing up** in the base station.

The handset registers automatically. Registration can take **up to 5 minutes**. **Do not remove the handset from the base station during this time.**

The following is displayed after successful registration:

- the strength of the reception signal between base station and handset:
  - good to poor:
  - no reception: flashes
- battery charge status:
  - (flat to full)
  - flashes: batteries almost flat
  - flashes: charging procedure

If you have purchased a **model with multiple handsets**, repeat the registration process for each handset. Handsets are assigned the lowest available internal number (1–4). If more than one handset is registered to the base station the internal handset number appears on the display, e.g. INT 2. If the internal numbers 1–4 are already assigned to other devices, the number 4 will be overwritten.

Please note

- Each key press interrupts the automatic registration.
- If automatic registration does not work, the handset will have to be registered manually (➜ page 41).

To charge the batteries, leave the handset in the charging cradle.

Please note

Only place the handset in the base station or charging cradle that is intended for it.

Should you have any questions and problems ➜ page 49.

Initial charging and discharging of batteries

The correct charge level can only be displayed if the batteries are first fully charged **and** discharged.

▸ Place the handset in the base station or charging cradle for **ten** hours.

▸ Then remove the handset from the base station or charging cradle and do not replace it until the batteries are completely discharged.

Please note

- After the first battery charge **and** discharge you may replace your handset in its base station or charging cradle after every call.
- Always repeat the charging and discharging procedure if you remove the batteries from the handset and reinsert them.
- The batteries may warm up during charging. This is not dangerous.
- After a while, the charge capacity of the batteries will decrease for technical reasons.

Setting the date and time

Set the date and time so that the correct date and time can be assigned to incoming calls, and so that the alarm can be used.



▶ Press the key below Menu on the display screen to open the main menu.

▶ Press the bottom of the control key ...



... until the Settings menu item appears.

▶ Press the key below OK on the display screen to confirm your selection.



The Date/Time menu item appears on the display.

▶ Press the key below OK on the display screen to open the input field.

- The active line is marked [...].
  Enter day, month and year as an 8-digit number via the handset, e.g. 0 + 1 oo 1 oo 0 + 2 abc 0 + 0 + 8 tuv for 01/10/08.

If you want to correct an entry, press the top or bottom of the control key to toggle between fields.

- Press the key below OK on the display screen to confirm your selection.

- Enter the hours and minutes as four digit numbers via the handset e.g. 0 + 7 pqrs 1 oo 5 jkl for 7:15 hours. If necessary, use the control key to toggle between fields.
- Press the key below OK on the display screen to confirm your selection.

The display shows Saved. You will hear a confirmation tone.

- Press and hold the end call key to return to the idle status.

Display in idle status



Once the phone is registered and the time set, the idle display is shown as in this example. If the answer machine is activated, the answer machine icon ⌾ will also be displayed in the header.

Your answer machine is set with a pre-recorded announcement.

Please note

The range icon is only displayed in idle status if Eco Mode+ (➔ page 40) is deactivated.

Your phone is now ready for use.

What would you like to do next?

Now you have successfully started your Gigaset you will probably want to adapt it to your personal requirements. Use the following guide to quickly locate the most important subjects.

If you are unfamiliar with menu-driven devices such as other Gigaset telephones you should first read the section entitled "Using the phone" ➔ page 17.

Information on ...	... is located here.
Setting the ringer tone melody and volume	page 44
Setting the handset volume	page 44
Recording a personal message for the answer machine	page 35
Setting Eco Mode / Eco Mode+	page 40
Operating the telephone on a PABX	page 48
Registering existing Gigaset handsets to a base station	page 41
Transferring directory entries from existing Gigaset handsets to the new handset(s)	page 26

If you have any questions about using your phone, please read the tips on troubleshooting (➔ page 49) or contact our Customer Care team (➔ page 49).

Using the phone

Control key

In the following description the side of the control key you need to press for each operation is indicated accordingly, e.g. ▲ for "press the top of the control key".

The control key has a number of different functions:

When the handset is in idle status

▼ Open the directory.

▲ Call up the menu for setting the handset's call volume (➔ page 44), ringer tones (➔ page 44) and advisory tones (➔ page 45).

In the main menu, in submenus and lists

▲ / ▼ Scroll up/down line by line.

In input fields

Use the control key to move the cursor to the left ▲ or right ▼.

During an external call

▼ Open the directory.

▲ Adjust the loudspeaker volume for earpiece and handsfree mode.

Display keys

The function of the display keys changes depending on the particular operating situation. Example:



Current display key functions are shown in the bottom display line.

Display keys

Important display keys:

Menu	Open a context-dependent menu.
OK	Confirm selection.
C	Delete key: deletes one character at a time from right to left.
	Go back one menu level or cancel operation.
→→	Open the last number redial list.

Keys on the keypad

[✆] / [▫+] / [*] etc.
Press the matching key on the handset.

Enter digits or letters.

Correcting incorrect entries

You can correct incorrect characters in the text by navigating to the incorrect entry using the control key. You can then:

- press C to delete the character to the left of the cursor,
- insert characters to the left of the cursor,
- overwrite the character (flashing) when entering the time and date etc.

Menu guidance

Your telephone's functions are accessed using a menu that has a number of levels.

Main menu (first menu level)

▶ When the handset is in idle status, press Menu to open the main menu

The main menu functions are shown on the display as a list with name and icon.

To access a function, i.e. to open the corresponding submenu (next menu level):

▶ Navigate to the function using the control key [↕]. Press the display key OK.

Submenus

The functions in the submenus are displayed as lists.

To access a function:

▶ Scroll to the function with the control key [↕] and press OK.

Or:

▶ Enter the corresponding digit combination (➔ page 21).

Briefly press the end call key [☎] once to return to the previous menu level/ cancel the operation.

Reverting to idle status

You can revert to idle status from anywhere in the menu as follows:

▶ Press and **hold** the end call key [☎].

Or:

▶ Do not press any key: after 2 minutes the display will **automatically** revert to idle status.

Any settings you have not confirmed by pressing OK will be discarded.

An example of the display in idle status is shown on ➔ page 15.

Activating/deactivating the handset

With the phone in idle status, press and **hold** the end call key (confirmation tone) to switch off the handset.
Press and **hold** the end call key again to switch the handset on.

Activating/deactivating the keypad lock

The keypad lock prevents any inadvertent use of the phone.

Press and **hold** the hash key to activate or deactivate the keypad lock. You will hear the confirmation tone.

When the keypad lock is activated you will see the icon on the display and a message when you press a key.

The keypad lock is deactivated automatically if someone calls you. It is reactivated when the call is finished.

Illustration of operating steps in the user guide

The operating steps are shown in abbreviated form.

Example:

The illustration:

Menu ➜ Settings ➜ Handset ➜ Auto Answer (✓ = on)

means:



▸ Press the display key Menu to open the main menu.



▸ Press the bottom of the control key until the Settings menu item appears on the display.

▸ Press the display key OK to confirm your selection.

▸ Press the bottom of the control key until the Handset menu item appears on the display.

▸ Press the display key OK to confirm your selection.

The Auto Answer menu item appears on the display.

▸ Press the display key OK to activate/deactivate the function (✓ = on)

Menu tree

Instead of scrolling to locate a menu function, you can select a function more quickly by opening the menu and keying in a digit combination (or shortcut).

Example: Menu 7pqrs 2abc 2abc for "Set ringer tone volume".

With the telephone in **idle status,** press Menu (open main menu):

1 SMS

1-1	Write Message	➔ page 31			
1-2	Incoming	➔ page 32			
1-3	Outgoing	➔ page 31			
1-4	Settings		1-4-1	Service Centres	➔ page 33

4 Alarm Clock

4-1	Activation	➔ page 41
4-2	Wake up time	➔ page 41

5 Voice Mail

5-1	Set Key 1		5-1-1	Network Mailbox	➔ page 39
			5-1-2	Answer Machine	➔ page 39
5-2	Answerphone	➔ page 35			
5-3	Call Screening		5-3-1	Handset	➔ page 37
			5-3-2	Base	➔ page 37
5-4	Announcements		5-4-1	Record Announcement	➔ page 35
			5-4-2	Play Announcement	➔ page 35
			5-4-3	Delete Announcement	➔ page 36
5-5	Message Length		5-5-1	Unlimited	➔ page 37
			5-5-2	1 Minute	
			5-5-3	2 Minutes	
			5-5-4	3 Minutes	
5-6	Ring Delay		5-6-1	Immediately	➔ page 37
			5-6-2	10 sec	
			5-6-3	18 sec	
			5-6-4	30 sec	
			5-6-5	Auto	

7 Settings

7-1	Date/Time	→ page 13			
7-2	Audio Settings	7-2-1	Call Volume	→ page 44	
		7-2-2	Ringer Volume	→ page 44	
		7-2-3	Ringer Melody	→ page 45	
		7-2-4	Advisory Tones	→ page 45	
		7-2-5	Battery Low	→ page 45	
7-3	Handset	7-3-1	Display	→ page 44	
		7-3-2	Language	→ page 43	
		7-3-3	Auto Answer	→ page 44	
		7-3-4	Register Handset	→ page 41	
		7-3-5	Reset Handset	→ page 45	
7-4	Base	7-4-1	Audio Settings (A585 base station only)	→ page 46	
		7-4-2	Calls List Type	→ page 28	
		7-4-3	System PIN	→ page 46	
		7-4-4	Base Reset	→ page 46	
		7-4-5	Additional Features	7-4-5-1	Repeater Mode → page 46
				7-4-5-3	Eco Mode → page 40
				7-4-5-4	Eco Mode+ → page 40
		7-4-6	Listening in	→ page 43	
		7-4-7	Preselection	→ page 29	

Making calls

Making an external call

External calls are calls using the public telephone network.

Enter the number and press the talk key.

Or:

Press and **hold** the talk key and then enter the number.

You can cancel the dialling operation with the end call key.

You are shown the duration of the call while the call is in progress.

Please note

- Dialling with the directory (→ page 25), calls list (→ page 27) and last number redial list (→ page 27) saves repeated typing of numbers.
- You can assign a number from the directory to a key for speed dialling (→ page 26).

Ending a call

Press the end call key.

Answering a call

The handset indicates an incoming call in three ways: by ringing, by a display on the screen and by the flashing handsfree key.

You can answer the call by:

- Pressing the talk key.
- Pressing the handsfree key.

If the handset is in the charging cradle and the Auto Answer function is activated (→ page 44), the handset automatically answers the call when you remove it from the charging cradle.

To deactivate the ringer tone, press the Menu display key and select Silent. You can take the call as long as it is displayed on the screen.

Calling Line Identification

When you receive a call, the caller's number is displayed on the screen if the following conditions are met:

- Your network provider supports CLIP, CLI.
  - CLI (Calling Line Identification): the caller's number is transmitted.
  - CLIP (Calling Line Identification Presentation): the caller's number is displayed.
- You have arranged CLIP with your network provider.
- The caller has arranged CLI with the network provider.

Call display with CLIP/CLI

If the caller's number is saved in your directory, the caller's name will also be displayed.



1 Ringer tone icon
2 Number or name of caller

The following is displayed in place of the number:

- External Call, if no number is transmitted.
- Withheld, if the caller has withheld Calling Line Identification.
- Unavailable, if the caller has not arranged Calling Line Identification.

Handsfree talking

In handsfree mode, instead of holding the handset to your ear you can put it down, for example on the table in front of you. This allows others to participate in the call.

Activating/deactivating handsfree mode

Activating while dialling

Enter the number and press the handsfree key.

- You should inform your caller before you use the handsfree function so that they know someone else is listening.

Switching between earpiece and handsfree mode

Press the handsfree key.

During a call and when listening to the answer machine (Gigaset A585 only), activate or deactivate handsfree mode.

If you wish to place the handset in the charging cradle during a call:

- Press and hold the handsfree key while placing the handset in the base station. If the handsfree key does not light up, press the key again.

For instructions on how to adjust the loudspeaker volume, see → page 44.

Muting

You can deactivate the microphone in your handset during an external call.

Mute Press the display key to mute the handset.

On Press the display key to switch the microphone back on.

Using the directory and lists

The options are:

- Directory
- Last number redial list
- SMS list
- Call history
- Answer machine list (Gigaset A585 only)

You can save up to 150 entries in the directory.

You can create a personalised directory for your own individual handset. However, you can send the list or individual entries to other handsets (➔ page 26).

Directory

In the **directory** you can save numbers and corresponding names.

▶ With the handset in idle status, open the directory by pressing the 🗒 key.

Length of entries

Number: max. 32 digits
Name: max. 16 characters

Please note

You can assign a number from the directory to a key for speed dialling ➔ page 26.

Saving the first number in the directory

🗒 ➔ Dir. empty New Entry?

Enter the number and press OK.

Enter the name and press OK.

Storing a number in the directory

🗒 ➔ Menu ➔ New Entry

Enter the number and press OK.

Enter the name and press OK.

Order of directory entries

The directory entries are usually sorted in alphabetical order. Spaces and digits take first priority. The sort order is as follows:

1. Space
2. Digits (0–9)
3. Letters (alphabetical)
4. Other characters

To get round the alphabetical order of the entries, insert a space or a digit in front of the name. These entries will then move to the beginning of the directory.

Selecting a directory entry

🗒 Open the directory.

You have the following options:

- Use 🗒 to scroll to the entry until the required name is selected.
- Enter the first character of the name, or scroll to the entry using 🗒 if required.

Dialling with the directory

🗒 ➔ 🗒 (Select entry)

📞 Press the talk key. The number is dialled.

Managing directory entries

🗒 ➔ 🗒 (Select entry)

Editing entries

Menu ➔ Edit Entry

Edit the number if required, and press OK.

Edit the name if required, and press OK.

Using other functions

Menu Press the display key.

The following functions can be selected with ▯:

Use Number
Save or modify a saved number and then dial with ✆ **or** save as a new entry; to do so, press Menu ➜ Copy to Directory ➜ OK after the number appears on the display.

Delete Entry
Delete selected entry.

Send Entry
Send a single entry to a handset (➜ page 26).

Delete List
Delete **all** directory entries.

Send List
Send complete list to a handset (➜ page 26).

Shortcut
Assign the current entry for speed dial to a selected key.

Using speed dial keys

You can assign directory entries to the keys 0 and 2-9:

▯ ➜ ▯ (select entry) ➜ Menu ➜ Shortcut ➜ ▦ (press the key you want to assign the number to)

To dial, press and **hold** the required speed dial key.

Sending the directory to another handset

Preconditions:

- The sending and receiving handsets must both be registered to the same base station.
- The other handset and the base station can send and receive directory entries.

▯ ➜ ▯ (select entry) ➜ Menu (open menu) ➜ Send Entry / Send List

▦ Enter the internal number of the receiving handset and press OK.

Successful transmission is acknowledged with the message Entry copied. . You can transfer several individual entries one after the other by responding OK to the Next entry? prompt.

Please note:

- Entries with identical numbers are not overwritten on the receiving handset.
- The transfer is cancelled if the phone rings or if the memory of the receiving handset is full.

Copying a displayed number to the directory

You can copy numbers displayed in a list, e.g. the calls list or redial list, to the directory.

A number is displayed:

Menu ➜ Copy to Directory

▸ Complete the entry ➜ page 25.

Gigaset A585: The message playback is interrupted during the number transfer from the answer machine list.

Using a number from the directory

In some operating situations you can open the directory to copy a number, for example. Your handset need not be in idle status.

▯ Open the directory.

▯ Select entry.

OK Press the display key.

Select function with ▯.

Last number redial list

The last number redial list contains the ten numbers last dialled with the handset (max. 32 numbers). If one of the numbers is in the directory, the corresponding name will be displayed.

Manual last number redial

[✆]	Press the key **briefly**.
[▯]	Select entry.
[✆]	Press the talk key again. The number is dialled.

Managing entries in the last number redial list

[✆]	Press the key **briefly**.
[▯]	Select entry.
Menu	Open menu.

The following functions can be selected with [▯]:

Use Number (as in the directory, ➔ page 26)

Copy to Directory
Copy an entry to the directory (➔ page 25).

Delete Entry (as in the directory, ➔ page 26)

Delete List (as in the directory, ➔ page 26)

Opening lists with the message key

You can use the message key [✉] to open the following list selection:

- SMS list
- Answer machine list (Gigaset A585 only) or network mailbox, if your network provider supports this function and the fast access is set for the network mailbox (➔ page 39).
- Call history

The message key [✉] will flash as soon as a **new entry** is received in a list (switches off when the key is pressed). The message You have new messages appears in the display in **idle status**.

Please note

If calls are saved in the network mailbox, you will receive a message if the appropriate settings have been made (see your network provider user guide).

List selection

The lists displayed after pressing the message key [✉] depend on whether there are any new messages.

[✉] key does not flash (no new messages):
Select a list with [▯]. To open, press OK.

[✉] key flashes (new messages received):
You see all the lists with new messages. If only one list contains new messages, this will be opened automatically.

Incoming SMS message list

All received SMS messages are saved in the incoming message list, ➔ page 32.

Call history

Precondition: Calling Line Identification (CLIP, ➔ page 23)

The calls list contains the last 25 numbers, depending on the settings

- all calls
  - answered calls
  - unanswered calls
  - calls recorded by the answer machine (Gigaset A585 only)
- missed calls
  - unanswered calls and
  - calls not recorded by the answer machine (Gigaset A585 only)

The calls list is displayed as follows:



1 Number of new entries
2 Number of old, read entries

Setting the call history type

Menu ➜ Settings ➜ Base ➜ Calls List

Missed Calls / All Calls
Select and press OK (☑ = on).

Press and **hold** (idle status).

The call history entries are retained when you change the list type.

Answer machine list (Gigaset A585)

You can use the answer machine list to listen to the messages that are on the answer machine.

The answer machine list is displayed as follows:



1 Number of new entries
2 Number of old, read entries

Opening calls/answer machine list (Gigaset A585)

✉ ➜ Calls List / Answ. Mach. 01+02

The last incoming call is displayed in the **calls list**.

The first new message received is displayed in the **answer machine list**. Playback begins. New messages are placed after old messages when they have been played back.

You can scroll through the list with ⇕.

List entry

Example of a list entry:



- Status of entry

  In the calls list

  New Call: new missed call.

  Old Call: entry already read.

  Call recv.: call taken.

  In the answer machine list

  Answer M (Gigaset A585):
  the answer machine took the call.
  A message was left.

  New Msg. (Gigaset A585):
  new message on the answer machine.

  Old Msg. (Gigaset A585):
  previously played back message on the answer machine.

- Entry number

  01/02 means e.g.: first of a total of two entries.

- Number or name of caller

  Press the talk key ✆ to make a return call.
  You can add the caller's number to the directory (➜ page 26).

- Call date and time (if set, page 43).

You can delete the current entry with Menu ➜ Delete Entry.

Answer machine list (Gigaset A585 only)

You can use the **answer machine list** to listen to the messages that are on the answer machine.

Making cost-effective calls

Automatic network provider code (preselection)

You can specify a call-by-call number (preselection number) that is **automatically** placed in front of numbers when you dial them.

- The "**with preselection**" list contains the "rule" for dialling code numbers or the first digits of dialling code numbers with which you wish the preselection number to be used.
- The "**without preselection**" list contains the "exception to the rule".

  Example:

  You have entered 08 for "with preselection". Now all numbers that start with 08 will be dialled with preselection. If, for example, you want 081 to still be dialled without preselection, enter 081 for "without preselection".

When dialling, the **first** digits of the selected numbers are compared with both lists after the talk/handsfree key is pressed:

- The preselection number is not prefixed if the dialled number
  - **does not** match any entries in the two lists
  - matches an entry in the "**without preselection**" list
- The preselection number is prefixed if the first digits of the dialled number match **only** one entry in the "**with preselection**" list.

Saving preselection numbers

Menu ➜ Settings ➜ Base ➜ Preselection ➜ Preselection Number

Enter or edit preselection number (call-by-call number).

OK Press the display key. The entry is saved.

Press and **hold** (idle status).

Save or change entries in the preselection lists

Each of the two lists can contain 11 entries, each with 4 digits.

Numbers may be prefixed according to the country in the "**with preselection**" list. This means, for example, that all national calls or calls to the mobile network are **automatically** linked to the preselection number you have saved previously.

Menu ➜ Settings ➜ Base ➜ Preselection ➜ With Preselection / Without Preselection

Select entry and press OK.

Enter or edit first digits of number.

OK Press the display key. The entry is saved.

Press and **hold** (idle status).

Temporarily cancelling preselection

(press and **hold**) ➜ Menu ➜ Automatic Preselect off

Permanently deactivating preselection

Menu ➜ Settings ➜ Base ➜ Preselection ➜ Preselection Number

Press <C> to delete the preselection number.

OK Press the display key. The entry is saved.

Press and **hold** (idle status).

Displaying the call duration

The duration of a call is displayed

- during the conversation,
- until about three seconds after the call has ended if you do not replace the handset in the base station or charging cradle.

Please note

The actual duration of the call can vary from that shown by a few seconds.

SMS (text messages)

Your phone is supplied ready for sending SMS messages immediately.

Preconditions:

- Calling Line Identification is enabled for your phone line.
- Your network provider supports SMS in the fixed line network (information on this can be obtained from your network provider).
- You are registered with your service provider to send and receive SMS messages.

SMS messages are exchanged between SMS centres operated by service providers. You must enter the SMS centre through which you wish to send and receive SMS messages into your phone. You can receive SMS messages from **every** SMS centre that is entered, provided you have registered with your service provider.

Your SMS messages are sent through the SMS centre that is entered as the active send service centre (➔ page 33). Only one SMS centre can be the active send service centre at any one time.

If no SMS service centre is entered, the SMS menu only contains the entry Settings. Enter an SMS Service Centre (➔ page 33).

Information on writing an SMS can be found in the appendix (➔ page 54). An SMS may contain up to 160 characters.

Please note:

- If your phone is connected to a PABX, please read page 33.
- To receive SMS messages you must be registered with your service provider.

Writing/sending an SMS

Menu ➔ SMS ➔ Write Message

Write an SMS. For how to enter text, ➔ page 54.

Menu ➔ Send Text

Select and press OK.

Enter the number with area code (including your local area code) from the directory or key it in manually, and press OK. The SMS is sent.

Please note

- If you are interrupted by an external call while writing an SMS, the text is automatically saved in the draft message list.
- If the memory is full, or if the SMS function on the base station is being used by another handset, the operation is cancelled. An appropriate message appears in the display. Delete SMS messages you no longer require or send the SMS later.

Draft message list

You can save an SMS in the draft message list, and edit and send it later.

Saving an SMS in the draft message list

Write an SMS (➔ page 31).

Menu ➔ Save Text

Opening the draft message list

Menu ➔ SMS ➔ Outgoing

The first entry in the list is displayed, e.g.:



1 Current number
2 Total number of SMS

Reading or deleting individual SMS messages

▶ Open the draft message list.

[↕] Select SMS.

Menu ➜ Read SMS
Select and press OK to read the SMS. Scroll through the SMS using [↕].

Or:

Menu ➜ Delete Entry
Select and press OK to delete the message.

Writing/changing an SMS

You are reading an SMS in the draft message list.

Menu Press the display key.

You have the following options:

Write Message
Write and then send a new SMS or save.

Use text
Change the text of the stored SMS and then send it.

Deleting draft message list

▶ Open the draft message list.

Menu ➜ Delete List
Select and press OK.

OK Press the display key to confirm the delete. The list is cleared.

[⏻] Press and **hold** (idle status).

Receiving an SMS

All received SMS messages are saved in the incoming message list. Since an SMS remains in the list even after it has been read, you should **regularly delete SMS messages from the list**.

Incoming message list

The incoming message list contains:

- All received SMS messages, starting with the latest.
- SMS messages that could not be sent due to an error.

New SMS messages are signalled on all Gigaset C45 handsets by a message in the display, the flashing message key [✉] and an advisory tone.

Opening the incoming message list with the [✉] key

[✉] Press.

The incoming message list is displayed as follows (example):



1 Number of new entries
2 Number of old, read entries

An entry in the list is displayed as in the following example:



1 Number of the SMS currently displayed
2 Total number of new SMS messages

Opening the incoming message list via the SMS menu

Menu ➜ SMS ➜ Incoming

Reading or deleting individual SMS messages

▶ Open the incoming message list.

[↕] Select SMS.

Menu ➜ Read SMS
Select and press OK to read the SMS. Scroll through the SMS using [↕].
After you have read a new SMS, its status turns to "old".

Or:

Menu ➜ Delete Entry
Select and press OK to delete the SMS.

Deleting the incoming message list

All **new and old** SMS messages in the list are deleted.

▶ Open the incoming message list.

Menu ➔ Delete List
Select and press OK.

OK Press the display key to confirm the delete. The list is cleared.

Adding the number of the message sender to the directory

▶ Open the incoming message list.

Select SMS.

Menu ➔ Copy to Directory

▶ Complete the entry ➔ page 25.

Replying to or forwarding SMS messages

You are reading an SMS.

Menu Press the display key.

You have the following options:

Reply
Write and send a reply SMS directly (➔ page 31).

Use text
Edit the text of the SMS and then send it.

Send Text
Forward the text of an SMS to another recipient.

Changing the character set

You are reading an SMS.

Menu Press the display key.

Character Set
Text is shown in the selected character set.

Setting SMS centres

Entering/changing SMS centres

▶ You should find out about the services and special functions offered by your service provider **before you make a new application** and before you delete preconfigured phone numbers.

Menu ➔ SMS ➔ Settings ➔ Service Centres

Select an SMS centre (e.g. SMS centre # 1) and press OK.

You have the following options:

Active Send Srvc. Cent.
If the SMS messages are to be sent through this SMS centre, press OK to activate the SMS centre (✓ = on). If a different SMS centre was active previously, then this will be deactivated.

SMS centre #
Enter the number of the SMS centre and press OK.

Sending an SMS via another SMS centre

▶ Activate the SMS centre (2 or 3) as the active send service centre (➔ page 33).

▶ Send the SMS.

SMS on a PABX

◆ You can only receive an SMS when the **Calling Line Identification is forwarded** to the extension of the PABX **(CLIP)**. The CLIP evaluation of the phone number for the SMS centre takes place in your **Gigaset**.

◆ If required, you must prefix the number for the SMS centre with the access code (depending on your PABX).

If in doubt, test your PABX, e.g. by sending an SMS to your own number: once with and once without the access code.

- When you send SMS messages, your sender number may be sent without your extension number. In this case the recipient cannot reply to you directly.

Sending and receiving SMS messages **on ISDN PABXs** is only possible via the MSN number assigned to your base station.

Activating/deactivating SMS function

The SMS function is active by default. If you deactivate the SMS function, you cannot send or receive any SMS messages with your phone.

The settings you have made for sending and receiving SMS messages (e.g. the numbers of the SMS centres) and the entries in the incoming and draft message lists are saved even after you turn off your phone.

Menu — Press the display key.

7 pqrs 4 ghi 9 wxyz 2 abc 3 def — Enter the digits.

0 + OK — Deactivate SMS function.

Or:

1 OK — Activate SMS function.

SMS troubleshooting

Error codes when sending

E0	Calling Line Identification permanently withheld (CLIR) or Calling Line Identification not activated.
FE	Error occurred during SMS transfer.
FD	Connection to SMS centre failed; see self-help.

Self-help with errors

The following table lists error situations and possible causes and provides notes on troubleshooting.

You cannot send messages. 1. You have not requested the CLIP service (Calling Line Identification Presentation). ▸ Ask your service provider to enable this service. 2. SMS transmission has been interrupted (e.g. by a call). ▸ Re-send the SMS. 3. Network provider does not support this feature. 4. No number or an invalid number is entered for the SMS centre set as the active send service centre. ▸ Enter the number (➔ page 33).
You receive an incomplete SMS. 1. Your phone's memory is full. ▸ Delete old SMS messages (➔ page 32). 2. The service provider has not yet sent the rest of the SMS.
The SMS is played back. 1. The "display call number" service is not activated. ▸ Ask your service provider to enable this feature (there is a charge for this). 2. Your mobile phone operator and your fixed line network SMS service provider have not agreed on a co-operation. ▸ Obtain information from your fixed line network SMS service provider. 3. Your end device has been recorded by your SMS provider as having no fixed line network SMS functionality, i.e. you are no longer registered with the provider. ▸ Have the device (re-)registered to receive SMS messages.
Messages are only received during the day. The terminal is recorded in your SMS provider's database as having no fixed network SMS functionality, i.e. you are no longer registered with the provider. ▸ Obtain information from your fixed line network SMS service provider. ▸ Have the device (re-)registered to receive SMS messages.

Operating the answer machine of the Gigaset A585 base station

You can operate the answer machine that is integrated into the base station using the keys on the base station (➔ page 2), via the handset or by remote operation (other phone/mobile phone). You can only record your own announcement messages using the handset.

Operation via the handset

The handset loudspeaker activates **automatically** if you receive an acoustic prompt or message while operating. You can switch it off with the handsfree key [◄].

Activating/deactivating the answer machine

Menu ➔ Voice Mail ➔ Answerphone (✓ = on)

When the answer machine is activated, the remaining memory time is announced. The ∞ icon appears in the display. The [✉] key lights up on the base station.

The telephone is supplied with a pre-recorded announcement. This pre-recorded announcement is used if no personal announcement is available.

If the memory is full, a corresponding message will appear on the display and the answer machine is automatically deactivated. It activates again automatically when you delete old messages.

Recording your own announcement

Menu ➔ Voice Mail ➔ Announcements ➔ Record Announcement

OK Press the display key to start the recording.

You hear the ready tone (short tone).

▶ Now speak your announcement (at least 3 sec.).

Cancel recording with [☎] or [↩]. Restart the recording with OK.

OK Press the display key to end the recording.

After recording, the announcement is played back for you to check.

Please note:

- Recording ends automatically when the max. recording time of 170 seconds is reached or if there is a break in speaking of more than 2 seconds.
- If you cancel the recording, the pre-recorded announcement will be used again.
- The recording is cancelled if the answer machine memory is full.
  ▶ Delete old messages and repeat recording if required.

Playing back announcements

Menu ➔ Voice Mail ➔ Announcements ➔ Play Announcement

[☎] Press and **hold** (idle status).

You will hear the pre-recorded announcement if you have not recorded one of your own.

Deleting announcements

Menu ➔ Voice Mail ➔ Announcements ➔ Delete Announcement

OK — Press the display key to confirm the prompt.

⏻ — Press and **hold** (idle status).

The pre-recorded announcement is used again after a personal announcement is deleted.

Playing back messages

The date and time of each message is logged (provided this has been set, ➔ page 13). If Calling Line Identification is activated, the caller's number is displayed. If the caller's number is saved in the directory, their name is displayed.

New messages that have not yet been played back are indicated by a message in the display and by the ✉ key flashing on the handset. The ▶■ key flashes on the base station.

To listen to messages:

✉ — Press the message key.

Answ. Mach. — Select as required and press OK.

If you have new messages, playback will start with the first new message, otherwise with the first old message.

See also answer machine list ➔ page 28.

Stopping and controlling playback

During message playback:

2 abc — Pause playback. Press 2 abc again to resume.
or

Menu — Stop playback. Press OK to resume.

↑ or 1 ∞ — Return to the start of the current message.
Press twice to go back to the previous message.

↓ or 3 def — Skip to the next message.
Press twice to skip to the next but one message.

If playback is interrupted for over a minute, the answer machine returns to idle status.

Copying the phone number of a message to the directory

During playback or pause:

Menu ➔ Copy to Directory
▸ Complete the entry ➔ page 25.

Deleting messages

You can either delete all old messages together or individually.

Deleting all old messages

During playback or pause:

Menu ➔ Delete all

OK — Press the display key to confirm the prompt.

Deleting individual old messages

While playback is paused:

<C — Press the display key.

Picking up a call from the answer machine

You can take a call while the answer machine is recording it:

✆ / 🔊 — Press the talk or handsfree key.

Recording stops and you can speak to the caller.

If 3 seconds of the call have already been recorded when you pick it up, the call will be displayed as a new message. The ✉ key on the handset flashes.

You can answer the call even if it is not signalled on the handset.

Activating/deactivating call screening

During recording of a message you can screen calls via the loudspeaker of the base station and registered handsets.

Permanently activating/deactivating call screening

Menu ➔ Voice Mail ➔ Call Screening ➔ Handset / Base (✓ = on)

Press and **hold** (idle status).

Call screening can be simultaneously activated on the base station and handset.

Deactivating call screening for the current recording

Press the end call key.

Setting up the answer machine

The answer machine has already been preset at the factory. Make individual settings using the handset.

Setting call acceptance

You can set when you want the answer machine to answer a call.

The options are: Immediately, 10 sec, 18 sec or 30 sec and Auto.

In Auto mode, the following applies for call acceptance:

- If there are no new messages, the answer machine answers a call after **18 seconds**.
- If new messages are present, the answer machine accepts a call after just **10 seconds**.

Menu ➔ Voice Mail ➔ Ring Delay

Select an option Immediately / 10 sec / 18 sec / 30 sec / Auto and press OK (✓ = on).

Press and **hold** (idle status).

Setting the recording time

You can set the maximum recording time of a message.

The options are: 1 Minute, 2 Minutes, 3 Minutes or Unlimited.

Menu ➔ Voice Mail ➔ Message Length

Select a recording time and press OK (✓ = on).

Press and **hold** (idle status).

Resetting fast access for the answer machine using key 1

The integrated answer machine has already been preset for fast access at the factory. However, if you have set the network mailbox for fast access (➔ page 39), you can reset this setting.

Menu ➔ Voice Mail ➔ Set Key 1

Answer Machine

Select and press OK.

Press and **hold** (idle status).

When you have selected the answer machine, press and **hold** key **1**. You will be connected directly.

The setting for fast access applies to all registered handsets.

Operating when on the move (remote operation)

You can check and activate your answer machine from any other telephone (hotel, pay phone etc.).

Preconditions:

- You have set a system PIN other than 0000 (➔ page 46).
- The phone you are using for remote operation has touch tone dialling (DTMF), i.e. you hear different tones when you press the keys. Alternatively, you can use a code transmitter (available from your mobile phone retailer).

Calling the answer machine and playing back messages

Dial your own number.

9 When you hear your announcement, press 9 and enter the system PIN.

You will be informed whether any new messages have been recorded. The messages are now played back. You can now operate the answer machine with the keypad.

The following keys are used for operation:

1 To return to the start of the current message.
Press twice to go back to the previous message.

2 Stop playback. Press again to resume.

3 Go to the next message.

0 Delete current message.

Activating the answer machine

▶ Phone home and let the phone ring until you hear: "Please enter PIN".

Enter system PIN.

Your answer machine is activated. It tells you how much memory time is left.

The messages are now played back.

The answer machine cannot be deactivated remotely.

Using the network mailbox

The network mailbox is your network provider's answer machine within the network. You cannot use the network mailbox unless you have **requested** it from your network provider.

Configuring fast access for the network mailbox

With fast access, you can dial the network mailbox or the integrated answer machine (Gigaset A585 only) directly.

Gigaset A580: Fast access is set for the network mailbox. You only need to enter the number of the network mailbox.

Gigaset A585: The integrated answer machine is set for fast access. Instead, you can define fast access for the network mailbox, e.g. the T-Home voice mailbox. Ask your network provider about this.

Configuring fast access for the network mailbox and entering the network mailbox number

Menu ➜ Voice Mail ➜ Set Key 1

Network Mailbox

Select and press OK (☑ = on).

Enter the network mailbox number and press OK.

Press and **hold** (idle status).

The setting for fast access applies to all handsets.

Calling the network mailbox

Press and **hold**. You are connected straight to the network mailbox.

Press handsfree key if required. You will hear the network mailbox announcement.

Viewing the network mailbox report

When a message is recorded, you receive a call from the network mailbox. If you have requested Calling Line Identification, the network mailbox number will be displayed. If you take the call, the new messages are played back. If you do not take the call, the network mailbox number will be saved in the missed calls list and the message key flashes (➜ page 27).

ECO DECT

You are helping to protect the environment with your Gigaset A580/A585.

Reduced energy consumption

Your telephone has an energy-saving adapter plug and uses less energy.

Reduced transmission power

The transmission power of your telephone is reduced **automatically**:

- The handset's transmission power is reduced depending on the distance to the base station.
- The transmission power at the base station is reduced to virtually zero when only one handset is registered and is standing in the base station.

You can reduce the transmission power of the handset and base station even further by using Eco Mode or Eco Mode+:

- **Eco Mode**
  80% transmission power reduction in standby and talk mode.
- **Eco Mode+**
  100% transmission power deactivation in standby mode.

Activate/deactivate Eco Mode / Eco Mode+:

Menu ➜ Settings ➜ Base ➜ Additional Features ➜ Eco Mode / Eco Mode+

OK Press the display key (☑ = on).

Status displays

Display icon	
(flashes)	Reception strength: – good to low – no reception
	Eco Mode+ enabled (displayed instead of the reception strength icon when in idle status)

Please note

- With **Eco Mode+** enabled, press and **hold** the talk key to check base station reachability. You will hear the dial tone if the base station is reachable.
- When **Eco Mode+** is enabled:
  – call setup will be delayed by approx. 2 seconds.
  – handset standby time will be reduced by approx. 50%.
- Registering handsets that do not support **Eco Mode+** will cause the mode to be deactivated on the base station and all other handsets.
- Activating **Eco Mode** reduces the range of the base station.
- **Eco Mode / Eco Mode+** and repeater support (➜ page 46) cancel each other out, i.e. you cannot use Eco Mode and Eco Mode+ when using a repeater.

Setting the alarm clock

Precondition: The date and time have already been set (➔ page 13).

Activating/deactivating the alarm clock

Menu ➔ Alarm Clock ➔ Activation
(✓ = on)

After you activate the alarm clock, the menu for setting the wake-up time opens automatically (➔ page 41).

If the alarm clock is set, the wake-up time appears with the ⏰ icon in the display instead of the date.

Setting the wake-up time

Menu ➔ Alarm Clock ➔ Wake up time

Enter the wake-up time in hours and minutes, then press OK.

When the alarm clock rings...

Alarm repeat after 5 minutes

Snooze Press the display key or any key.

If you press Snooze three times, the alarm clock switches off for 24 hours.

Turning off the alarm clock for 24 hours

Off Press the display key.

Using several handsets

Registering handsets

You can register up to four handsets on your base station.

Please note

Each additional handset must be registered on the base station in order for it to work properly!

For how to register your handset automatically, ➔ page 11.

If automatic registration does not work, you will have to register the handset manually.

Manual registration of Gigaset A58H to Gigaset A580/A585

You must activate manual registration of the handset on both the handset and the base station.

Once it has been registered, the handset returns to idle status. The handset's internal number is shown in the display, e.g. INT 1. If it does not appear, repeat the procedure.

On the handset

Menu ➔ Settings ➔ Handset ➔ Register Handset

Enter the system PIN of the base station (the default is 0000) and press OK. Handset is registering flashes on the display.

On the base station

Within 60 sec., press and **hold** the registration/paging key on the base station(➔ page 2) (approx. 3 sec.).

Registering other handsets

You can register other Gigaset handsets and handsets for other devices with GAP functionality as follows.

On the handset

▶ Start to register the handset as described in its user guide.

On the base station

Press and **hold** the registration/paging key on the base station (➔ page 2) (approx. 3 sec.).

De-registering handsets

Handsets can only be de-registered by resetting the base station to its default settings. **This will also reset every other setting** ➔ page 46**.**

Locating a handset ("paging")

You can locate your handset using the base station.

▶ **Briefly** press the registration/paging key on the base station (➔ page 2).

▶ All handsets will ring simultaneously ("paging"), even if the ringer tones are deactivated.

Ending paging

▶ **Briefly** press the registration/paging key on the base station or press the talk key [✆] on the handset.

Making internal calls

Internal calls to other handsets registered on the same base station are free.

Calling other handsets

[INT] Start internal call. The display shows Insert INT No..

[keypad] Enter the internal number of the receiving handset and press OK. The handset is called.

or:

All Press the display key and OK. All handsets are called.

Ending a call

[end] Press the end call key.

Transferring a call to another handset/ making an internal consultation call

You are talking to an external participant and can call an internal participant at the same time to forward the call or to consult.

▶ Calling internal participants

When an internal participant answers:

▶ If necessary announce the external call.

Either

[end] Press the end call key. The call is transferred.

or

[↩] Press the display key. You are reconnected with the external participant.

When transferring a call you can also press the end call key [end] before the internal participant answers. Then, if the internal participant does not answer or the line is busy, the call will automatically return to you (the display will show Recall).

Answering a waiting call

If you receive an **external** call during an **internal** call, you will hear the call waiting tone (short tone). The caller's number will appear in the display if phone number identification is enabled.

Press the end call key to end the internal call.

Press the talk key to take the external call.

Listening in to an external call (conference)

You are conducting an external call. An internal participant can listen in on this call and take part in the conversation. A signal tone and Conference Call on the display indicates the inclusion of a new participant to the conversation to all participants

Precondition: The Listening in function must be activated.

Activating/deactivating listening in

Menu ➜ Settings ➜ Base ➜ Listening in (✓ = on)

Press and **hold** (idle status).

Internal listening in

The line is engaged with an external call. Your screen will display information to that effect. You want to listen in to the external call.

Press and **hold** the talk key.

You are linked into the call. All participants hear a signal tone. Conference Call appears in the display.

Ending listening in

An internal participant presses the end call key.

All participants hear a signal tone.

This does not affect the connection between the other internal participants and the external caller.

Handset settings

Your handset is preconfigured, but you can change the settings to suit your individual requirements.

Changing date and time

To change the time, open the input field with:

Menu ➜ Settings ➜ Date/Time

Enter Date:

Enter the day, month and year in 8-digit format, e.g. 0 + 1 ∞ 1 ∞ 0 + 2 abc 0 + 0 + 8 tuv for 01/10/08.

Enter Time:

Enter hours and minutes as 4 digits, e.g. 0 + 7 pqrs 1 ∞ 5 jkl for 07:15 a.m.

OK Press the display key

Changing the display language

You can view the display texts in different languages.

Menu ➜ Settings ➜ Handset ➜ Language

The current language is indicated by ✓.

Select a language and press OK.

Press and **hold** (idle status).

If you accidentally choose a language you do not understand:

Menu 8 tuv 3 def 2 abc

Press keys in sequence.

Select the correct language and press OK.

Setting the display

You can display a digital clock when the handset is in idle status.

Menu ➜ Settings ➜ Handset ➜ Display

You have the following options:

Screensaver
The available settings are No Screensaver or Digital Clock.

Activating/deactivating auto answer

When this function is activated, when a call arrives you can simply lift the handset out of the base station without having to press the talk key.

Menu ➜ Settings ➜ Handset ➜ Auto Answer (✓ = on)

Press and **hold** (idle status).

Changing the handsfree/ earpiece volume

You can adjust the volume for handsfree talking to one of five settings (1-5, e.g. volume 3 = ▂▄▆) and the earpiece volume to one of three (1-3, e.g. volume 2 = ▂▄).

Setting the volume during a call

The setting applies to the current mode (earpiece or hands-free).

You are conducting an external call.

Press the control key.

Set the volume.

The setting will automatically be saved after approx. 3 seconds, if not then press the display key OK.

Adjusting the volume via the menu

Menu ➜ Settings ➜ Audio Settings ➜ Call Volume ➜ Earpiece Volume / Handsfree Volume

Adjust the volume and press OK.

Press and **hold** (idle status).

Changing ringer tones

- Volume:
  Five volume levels (1–5; e.g. volume 3 = ▂▄▆◿) and "crescendo" ring (6; volume increases with each ringer tone = ▂▄▆◢).
- Melody:
  List of pre-loaded ringer melodies. The first three melodies are the "classical" ringer tones.

You can also set different ringer melodies for the following functions:

- External Calls: for external calls
- Internal Calls: for internal calls
- Alarm Clock: for the alarm clock

For how to set the ringer tones for the base station, ➜ page 46.

Setting the ringer volume

The ringer volume is the same for all types of ring.

Menu ➜ Settings ➜ Audio Settings ➜ Ringer Volume

Or in idle status:

➜ Ringer Volume.

Then:

Adjust the volume and press OK.

Press and **hold** (idle status).

Setting the ringer melody

Set different ringer melodies for external calls, internal calls and the alarm clock.

Menu ➜ Settings ➜ Audio Settings ➜ Ringer Melody

External Calls / Internal Calls / Alarm Clock
Select and press OK.

Select melody (✓ = on) and press OK.

Press and **hold** (idle status).

Activating/deactivating the ringer

You can turn off the ringer on your handset before you take a call or while the phone is in idle status. You can take a call so long as it is displayed on the screen.

Deactivating the ringer

Press the star key **and hold**, until the icon appears in the display.

Reactivating the ringer

Press and **hold** the star key in idle status.

Advisory tones

Your handset uses "advisory tones" to tell you about different activities and statuses. The following tones can be activated and deactivated independently of each other:

- **Advisory tones**:
  - **Key click**: every key press is confirmed.
  - **Confirmation tone** (rising tone sequence): at the end of an entry/setting, when the handset is placed in the base station and on arrival of an SMS or a new entry in the answer machine list or the calls list.
  - **Error tone** (descending tone sequence): when you make an incorrect entry.
  - **Menu end tone**: when scrolling at the end of a menu.
- **Battery low beep**: the battery requires charging.

You cannot deactivate the confirmation tone for placing the handset in the base station.

Activating/deactivating advisory tones

Menu ➜ Settings ➜ Audio Settings ➜ Advisory Tones
Select and press OK (✓ = on).

Setting the battery low beep

Menu ➜ Settings ➜ Audio Settings ➜ Battery Low

On / Off / During Call
Select and press OK (✓ = on). The battery low beep is activated or deactivated or sounds during a call.

Restoring the handset to the factory settings

You can reset any individual settings and changes that you have made. This will not affect entries in the directory, calls list or SMS lists, or the handset's registration to the base station.

Menu ➜ Settings ➜ Handset ➜ Reset Handset

Confirm query with OK or reject it with .

Press and **hold** (idle status).

Base station settings

The base station settings are carried out using a registered Gigaset A58H handset.

Protecting against unauthorised access

Protect the system settings of the base station with a PIN known only to yourself. You may have to enter the system PIN into the base station when manually registering a handset.

Changing the system PIN

You can change the base station's 4-digit default system PIN ("0000") to a 4-digit PIN known only to yourself.

Menu ➜ Settings ➜ Base ➜ System PIN

Enter the **old** system PIN and press OK. For security, the PIN is shown as four stars (****).

Enter your **new** system PIN and press OK.

Press and **hold** (idle status).

Resetting the system PIN

If you have forgotten the system PIN, you can reset it to the original code **0000** by resetting the base station to its default settings. **This will also reset every other setting**, see "Restoring the base station to the factory settings" ➜ page 46.

Changing ringer tones

- Volume:

  You can choose between five volumes and the "crescendo" ring, ➜ page 44. Select "0" to deactivate the base station ringer.
- Ringer tones:

  You can set a ringer melody for external calls, ➜ page 44.

Menu ➜ Settings ➜ Base ➜ Audio Settings ➜ Ringer Volume / Ringer Melody

For how to adjust the settings, ➜ page 44.

Repeater support

With a repeater you can increase the range and reception strength of your base station. You will need to activate repeater mode. This will terminate any calls that are in progress at the time.

Precondition: A repeater is registered. The **Eco Mode / Eco Mode+** mode is deactivated.

Menu ➜ Settings ➜ Base ➜ Additional Features ➜ Repeater Mode

Yes Press the display key.

When repeater mode is active, the menu item is marked with ☑.

Please note

Repeater support and **Eco Mode / Eco Mode+** (➜ page 40) cancel each other out, i.e. both functions cannot be used at the same time.

Restoring the base station to the factory settings

When restoring factory settings:

- Handsets are de-registered
  - **When resetting via the menu:** all Gigaset handsets
  - **When resetting using the key on the base station:** also all handsets of other GAP capable devices
- Individual settings are reset
- All lists are deleted
- The system PIN is reset to the original code **0000**
- Eco Mode+ is deactivated

Only the date and time are retained.

Resetting the base station via the menu

Menu ➜ Settings ➜ Base ➜ Base Reset

OK Press the display key to confirm.

Resetting the base station using a key on the base station

- Disconnect the power cord from the base station.
- Hold down the registration/paging key (➜ page 2) on the base station while reconnecting the power cable to the base station. Press and hold the key until you hear a confirmation tone.

The base station has now been reset.

Connecting the phone to a PABX

The following settings are only necessary when your PABX requires them; see the PABX user guide.

You cannot send or receive SMS messages on PABXs that do not support Calling Line Identification.

Dialling modes and recall

The current setting is indicated by ☑.

Changing the dialling mode

The following dialling modes can be selected:

- Touch tone dialling (DTMF)
- Dial pulsing (DP)

Menu 7 pqrs 4 ghi 9 wxyz 1 1 1

1 OK Dial pulsing mode (DP).

Or:

0 + OK Touch tone dialling (DTMF).

Press and **hold** (idle status).

Setting recall

For operation on a PABX, you may have to change this value. Please refer to the user guide for your PABX.

Menu 7 pqrs 4 ghi 9 wxyz 1 1 2 abc

Enter digits for the recall time and press OK.

0 = 80 ms; **1** = 100 ms; **2** = 120 ms; **3** = 180 ms; **4** = 250 ms; **5** = 300 ms; **6** = 600 ms; **7** = 800 ms

Press and **hold** (idle status).

Setting pauses

Changing pause after line seizure

You can change the length of pause that is inserted between pressing the talk key and sending the number.

Menu 7 pqrs 4 ghi 9 wxyz 1 1 9 wxyz

Enter digit for the pause length (**1** = 1 sec.; **2** = 3 sec.; **3** = 7 sec) and press OK.

Press and **hold** (idle status).

Changing the pause after the recall key

You can change the length of the pause if your PABX requires this (refer to the user guide for your PABX).

Menu 7 pqrs 4 ghi 9 wxyz 1 1 4 ghi

Enter a digit for the length of the pause (**1** = 800 ms; **2** = 1600 ms; **3** = 3200 ms) and press OK.

Press and **hold** (idle status).

Switching temporarily to touch tone dialling (DTMF)

If your PABX still operates with dial pulsing (DP), but you need touch tone dialling (DTMF) for a connection (e.g. to listen to the network mailbox) you must switch to touch tone dialling for the call.

Precondition: You are conducting a call or have already dialled an external number.

* q

Press the star key.
After the call is ended, dial pulsing is automatically activated again.

Service (Customer Care)

We offer you support that is fast and tailored to your specific needs!

Our Online Support on the Internet can be reached any time from anywhere.
www.gigaset.com/customercare
It provides you with 24/7 support for all our products. It also provides a list of FAQs and answers plus user guides and current software updates (if available for the product) for you to download.

You will also find frequently asked questions and answers in the appendix of this user guide.

For personal advice on our range of products and assistance with repairs or guarantee/warranty claims you can contact us on:

UK helpdesk: 0 84 53 67 08 12.

Please have your proof of purchase ready when calling with regard to guarantee/ warranty claims.

Replacement or repair services are not offered in countries where our product is not sold by authorised dealers.

Questions and answers

If you have any questions about using your phone, visit us at www.gigaset.com/customercare at any time. The table below contains a list of common problems and possible solutions.

The display is blank.

1. The handset is not switched on.
   - Press **and hold** the end call key.
2. The batteries are flat.
   - Charge or replace the batteries (→ page 10).

" Base" flashes in the display.

1. The handset is outside the range of the base station.
   - Move the handset closer to the base station.

   The base station's range is reduced because Eco Mode mode is activated.
   - Deactivate Eco Mode (→ page 40) or reduce the distance between the handset and base station.
3. The base station is not turned on.
   - Check the base station's mains adapter (→ page 8).

Handset does not ring.

1. The ringer is deactivated.
   - Activate the ringer (→ page 45).

You cannot hear a ringer/dialling tone from the fixed line network.

The phone cord supplied has not been used or has been replaced by a new cord with the wrong pin connections.
- Please always use the phone cord supplied or ensure that the pin connections are correct when purchasing from a retailer (→ page 53).

Error tone sounds after system PIN prompt.

You have entered the wrong system PIN.
- Reset the system PIN to 0000 (→ page 46).

Forgotten the system PIN.

- Reset the system PIN to 0000 (→ page 46).

The other party cannot hear you.

You have pressed the Mute display key.
The handset is "muted".
- Activate the microphone again (→ page 24).

The number of the caller is not displayed despite CLIP.

Calling Line Identification is not enabled.
- **The caller** should ask the network provider to release Calling Line Identification (CLI).

You hear an error tone (descending tone sequence) when inputting.

Action has failed/invalid input.
- Repeat the operation.
  Watch the display and refer to the user guide if necessary.

You cannot listen to messages on the network mailbox.

Your PABX is set for dial pulsing.
- Set your PABX to touch tone dialling.

Gigaset A585 only:

No time is specified for a message in the answer machine history.

Date/time is not set.
- Set the date/time (➔ page 13).

The answer machine announces "PIN is incorrect" during remote operation.

1 You have entered the wrong system PIN.
- Enter the system PIN again.

2 The system PIN is still set to 0000.
- Change the system PIN (➔ page 46).

The answer machine will not record any messages.

Its memory is full.
- Delete old messages.
- Play back new messages and delete.

Authorisation

This device is intended for analogue phone lines in the UK.

Country-specific requirements have been taken into consideration.

We, Gigaset Communications GmbH, declare that this device meets the essential requirements and other relevant regulations laid down in Directive 1999/5/EC.

A copy of the 1999/5/EC Declaration of Conformity is available at this Internet address:
www.gigaset.com/docs.

CE 0682

Guarantee Certificate United Kingdom

Without prejudice to any claim the user (customer) may have in relation to the dealer or retailer, the customer shall be granted a manufacturer's Guarantee under the conditions set out below:

- In the case of new devices and their components exhibiting defects resulting from manufacturing and/or material faults within 24 months of purchase, Gigaset Communications shall, at its own option and free of charge, either replace the device with another device reflecting the current state of the art, or repair the said device. In respect of parts subject to wear and tear (including but not limited to, batteries, keypads, casing), this warranty shall be valid for six months from the date of purchase.
- This Guarantee shall be invalid if the device defect is attributable to improper treatment and/or failure to comply with information contained in the user guides.
- This Guarantee shall not apply to or extend to services performed by the authorised dealer or the customer themselves (e. g. installation, configuration, software downloads). User guides and any software supplied on a separate data medium shall be excluded from the Guarantee.
- The purchase receipt, together with the date of purchase, shall be required as evidence for invoking the Guarantee. Claims under the Guarantee must be submitted within two months of the Guarantee default becoming evident.
- Ownership of devices or components replaced by and returned to Gigaset Communications shall vest in Gigaset Communications.

- This Guarantee shall apply to new devices purchased in the European Union. For Products sold in the United Kingdom the Guarantee is issued by: Gigaset Communications GmbH, Schlavenhorst 66, D-46395 Bocholt, Germany.
- Any other claims resulting out of or in connection with the device shall be excluded from this Guarantee. Nothing in this Guarantee shall attempt to limit or exclude a Customers Statutory Rights, nor the manufacturer's liability for death or personal injury resulting from its negligence.
- The duration of the Guarantee shall not be extended by services rendered under the terms of the Guarantee.
- Insofar as no Guarantee default exists, Gigaset Communications reserves the right to charge the customer for replacement or repair.
- The above provisions does not imply a change in the burden of proof to the detriment of the customer.

To invoke this Guarantee, please contact the Gigaset Communications telephone service. The relevant number is to be found in the accompanying user guide.

Environment

Our environmental mission statement

We at Gigaset Communications GmbH carry social responsibility and are actively engaged in the interests of a better world. Our ideas, technologies and actions serve people, society and the environment. The aim of our global activity is to secure sustainable life resources for humanity. We are committed to a responsibility for our products that comprises their entire life cycle. The environmental impact of products, including their manufacture, procurement, distribution, utilization, service and disposal, are already evaluated during product and process design.

Further information on environmentally friendly products and processes is available on the Internet under www.gigaset.com.

Environmental management system

Gigaset Communications GmbH is certified pursuant to the international standards EN 14001 and ISO 9001.

ISO 14001 (Environment):
certified since September 2007 by TüV SÜD Management Service GmbH.

ISO 9001 (Quality):
certified since 17/02/1994 by TüV Süd Management Service GmbH.

Ecological energy consumption

The use of ECO DECT (➔ page 40) saves energy and is an active contribution towards protecting the environment.

Disposal

Batteries should not be disposed of in general household waste. Observe the local waste disposal regulations, details of which can be obtained from your local authority or the dealer you purchased the product from.

All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.

IThis crossed-out wheeled bin symbol on the product means the product is covered by the European Directive 2002/96/EC.

The correct disposal and separate collection of your old appliance will help prevent potential negative consequences for the environment and human health. It is a precondition for reuse and recycling of used electrical and electronic equipment.

For more detailed information about disposal of your old appliance, please contact your local council refuse centre or the original supplier of the product.

Appendix

Care

Wipe the base station, charging cradle and handset with a **damp** cloth (do not use solvent) or an antistatic cloth.

Never use a dry cloth. This can cause static.

Contact with liquid ⚠

If the handset has come into contact with liquid:

1. **Switch off the handset and remove the battery pack immediately**.
2. Allow the liquid to drain from the handset.
3. Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place **for at least 72 hours** (**not** in a microwave, oven etc.).
4. **Do not switch on the handset again until it is completely dry.**

When it has fully dried out, you will normally be able to use it again.

Specifications

Recommended batteries

Technology:	Nickel-metal-hydride (NiMH)
Size:	AAA (Micro, HR03)
Voltage:	1.2 V
Capacity:	550 – 1000 mAh

We recommend the following battery types, because these are the only ones that guarantee the specified operating times, full functionality and long service life:

- GP 700 mAh
- Yuasa Phone 700 mAh
- Yuasa Phone 800 mAh
- Yuasa AAA 800
- Peacebay 600 mAh

The device is supplied with two recommended batteries.

Handset operating times/charging times

The operating time of your Gigaset depends on the capacity and age of the batteries and the way they are used. (All times are maximum possible times

	Capacity (mAh) approx.			
	550	650	800	1000
Standby time (hours)	180	210	265	330
Talktime (hours)	23	25	33	41
Operating time for 1.5 hrs of calls per day (hours)	80	95	115	145
Charging time, base station (hours)	8	10	12	15
Charging time, charging cradle (hours)	6	7	9	11

At the time of going to print, batteries up to 800 mAh were available and had been tested in the system. Due to the constant progression in battery development, the list of recommended batteries in the FAQ section of the Gigaset Customer Care pages is regularly updated:

www.gigaset.com/customercare

Base station power consumption

In standby condition – Handset in charging cradle – Handset outside charging cradle	 approx. 1.3 W approx. 1.3 W
During a call	approx. 1.5 W

General specifications

DECT standard	is supported
GAP standard	is supported
No. of channels	60 duplex channels
Radio frequency range	1880–1900 MHz
Duplex method	Time multiplex, 10 ms frame length
Channel grid	1728 kHz
Bit rate	1152 kbit/s
Modulation	GFSK
Language code	32 kbit/s
Transmission power	10 mW, average power per channel
Range	up to 300 m outdoors, up to 50 m indoors
Base station power supply	230 V ~/50 Hz
Environmental conditions in operation	+5 °C to +45 °C, 20 % to 75 % relative humidity
Dialling mode	DTMF (touch tone dialling)/DP (dial pulsing)

Pin connections on the telephone jack



1 unused
2 unused
3 a
4 b
5 unused
6 unused

Writing and editing text

The following rules apply when writing text:

- Use ▲ ▼ to move the cursor to the right or left.
- Characters are inserted to the left of the cursor.
- The first letter of the name of directory entries is automatically capitalised, followed by lower case letters.

Writing an SMS/names

Press the relevant key several times to enter letters/characters.

Standard characters

	1x	2x	3x	4x	5x	6x	7x	8x	9x	10x	11x	12x	13x	14x
1	1)	2)	1	€	£	$	¥	¤						
2 abc	a	b	c	2	ä	á	à	â	ã	ç				
3 def	d	e	f	3	ë	é	è	ê						
4 ghi	g	h	i	4	ï	í	ì	î						
5 jkl	j	k	l	5										
6 mno	m	n	o	6	ö	ñ	ó	ò	ô	õ				
7 pqrs	p	q	r	s	7	ß								
8 tuv	t	u	v	8	ü	ú	ù	û						
9 wxyz	w	x	y	z	9	ÿ	ý	æ	ø	å				
0 +	.	,	?	!	0	+	-	:	¿	¡	“	‘	;	_
* ⌂	*	/	(	)	<	=	>	%						
# ⇧			#	@	\	&	§							

1) Space
2) Line break

When you press and **hold** a key, the characters of that key appear in the display and are highlighted one after the other. When you release the key, the highlighted character is inserted into the input field.

Setting upper/lower case or digits

Press the hash key # ⇧ **briefly** to switch from "Abc" mode to "123" and from "123" to "abc" and from "abc" to "Abc" (upper case: 1st letter upper case, all others lower case). Press the hash key # ⇧ **before** entering the letter.

You can see briefly in the display whether upper case, lower case or digits is selected.

Accessories

Gigaset handsets

Upgrade your Gigaset to a cordless PABX:

Gigaset C38H handset

- Illuminated graphical colour display (65k colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 150 entries
- SMS (precondition: CLIP must be enabled)
- Headset socket

www.gigaset.com/gigasetC38H

Gigaset A58H handset

- Illuminated graphic display
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 150 entries
- SMS (precondition: CLIP must be enabled)

www.gigaset.com/gigasetA58H

Gigaset C47H handset

- Illuminated graphical colour display (65k colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 150 entries
- SMS (precondition: CLIP must be enabled)
- Headset socket
- Room monitor

www.gigaset.com/gigasetC47H

Gigaset S67H/S68H handset

- Illuminated graphical colour display (65k colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 250 entries
- Picture CLIP
- SMS (precondition: CLIP must be enabled)
- Headset socket
- Bluetooth (S68H only)
- Room monitor

www.gigaset.com/gigasetS67H
www.gigaset.com/gigasetS68H

Gigaset SL37H handset

- Illuminated graphical colour display (65k colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 250 entries
- Picture CLIP
- SMS (precondition: CLIP must be enabled)
- PC interface. e.g. for managing directory entries, ringer tones and screensavers
- Headset socket
- Bluetooth
- Room monitor
- Walky-talky function

www.gigaset.com/gigasetSL37H

Gigaset SL56 handset

- Illuminated graphical colour display (65k colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 250 entries
- Picture CLIP
- SMS (precondition: CLIP must be enabled)
- Voice dialling
- PC interface. e.g. for managing directory entries, ringer tones and screensavers
- Headset socket
- Bluetooth

www.gigaset.com/gigasetSL56

Gigaset E45 handset

- Dust and splash proof casing
- Illuminated colour display (4096 colours)
- Illuminated keypad
- Handsfree talking
- Polyphonic ringer tones
- Directory for around 150 entries
- SMS (precondition: CLIP must be enabled)
- Headset socket
- Room monitor

www.gigaset.com/gigasetE45

Gigaset repeater

The Gigaset repeater can be used to increase the reception range of your Gigaset handset to the base station.

www.gigaset.com/gigasetrepeater

Ordering Gigaset products

You can order all the Gigaset products shown here and many others from your retail dealer.

Only use original accessories. This will avoid possible health risks and damage to property, and also ensure that all the relevant regulations are complied with.

Mounting the base station to the wall

A580: 40 mm
A585: 46 mm



approx.
2.5 mm

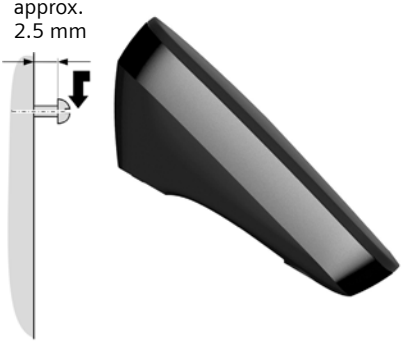

Mounting the charging cradle to the wall

21 mm



approx.
2.5 mm

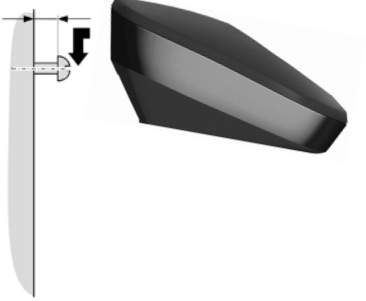

Index

A

Access protection 46
Accessories 55
Activating
  advisory tones 45
  answer machine 35
  answer machine (remote operation) 38
  call acceptance 44
  handset 19
  internal call screening 43
  keypad lock 19
Advisory tones 45
Alarm 41
Alarm repeat 41
Answer machine 35
  list 27, 28
  remote operation 38
Answer machine, see also Network mailbox
Authorisation 50
Auto answer 44
Automatic
  call acceptance 23
  network provider preselection 29

B

Base station
  connecting 8
  connecting to PABX 48
  power consumption 53
  restoring to factory settings 46
  setting 46
  setting up 8
  system PIN 46
Battery
  charging 1, 12
  display 1
  icon 1, 11
  inserting 10
  recommended batteries 52
  warning tone 45

C

Call
  accepting 23
  ending 23
  external 23
  internal 42
  party listening in 43
  picking up from answer machine . . 36
  transferring (connecting) 42
Call acceptance 37, 44
Call duration 23, 30
Call history 27
Call screening during recording 37
Call waiting during an internal call . . . 43
Calling
  external 23
  internal 42
Calling Line Identification 23
Cancelling
  preselection 29
Care of the telephone 52
Changing
  dialling mode 48
  earpiece volume 44
  handsfree volume 44
  pause time 48
  system PIN 46
Character set 33, 54
Charge status display 1
CLI, CLIP 23
Conference 43
Configuring the network mailbox 39
Confirmation tone 45
Connecting, base station to PABX 48
Control key 1, 17
Correcting incorrect entries 18
Customer Care 49

D

Deactivating
- advisory tones 45
- answer machine 35
- call acceptance 44
- handset 19
- internal call screening 43
- keypad lock 19

Delete key 17
Deleting
- announcement (answer machine) . . 35
- characters 18

Dial pulsing 48
Dialling
- directory 25
- mode 48
- with speed dial 26

Dialling pause
- entering 1

Digital clock 44
Directory 25
- copying number 26
- copying number from text. 26
- managing entries 25
- opening 17
- order of entries. 25
- saving entry 25
- saving sender's (SMS) number. 33
- saving the first number 25
- sending entry/list to handset 26

Display
- call duration 30
- changing display language 43
- in idle status. 18
- keys 1, 17
- network mailbox report. 39
- number (CLI/CLIP) 23
- screensaver 44
- setting 44

Disposal 52
DP (dial pulsing) 48
DTMF (touch tone dialling method). . . 48

E

Earpiece mode 24
Earpiece volume 44
ECO DECT 40
Eco mode 40
Eco mode+ 40
End call key. 1, 23
Ending, call. 23
Ending, see Deactivating
Entry
- saving (network mailbox) 39
- saving, changing (preselection) . . . 29
- selecting from directory 25

Environment. 51
Error tone 45

F

Fast access
- answer machine 37
- network mailbox 39

G

General troubleshooting 49
Guarantee Certificate 50

H

Handset
- activating/deactivating 19
- advisory tones 45
- contact with liquid 52
- de-registering 41, 46
- display language 43
- earpiece volume 44
- handsfree volume 44
- idle status 18
- locating. 42
- muting 24
- paging 42
- registering. 41
- restoring to factory settings 45
- setting 43
- setting up 10
- transferring a call. 42
- using several 41, 42

Handsfree key. 1
Handsfree talking 24

Hash key 1, 19
Hearing aids 6
Help 49

I

Icon
  battery 11
  display 17
  for new messages 27
  keypad lock 19
Idle status
  display 18
  returning to 18
Incorrect input (correction) 18
Installing, base station 8
Internal
  call screening 43
  key 1
  making calls 42
Internal call 42
  call waiting 43

K

Key 1 (fast access) 1, 37
Key click 45
Keypad lock 19
Keys
  assigning directory entry 26
  control key 1, 17
  delete key 17
  display keys 1, 17
  end call key 1, 23
  fast access 1, 37
  handsfree key 1
  hash key 1, 19
  internal key 1
  message key 1
  on/off key 1
  recall key 1
  speed dial 26
  star key 1, 45
  talk key 1, 23

L

Last number redial 27
Liquid 52
List
  answer machine 27, 28
  answer machine list 28
  call history 27
  draft message list (SMS) 31
  incoming message list (SMS) 32
  missed calls 27, 28
  network mailbox 27
  SMS list 27
Locating, handset 42
Lock
  activating/deactivating keypad lock . 19

M

Mains adapter 6
Making calls
  answering a call 23
  cost-effective calls 29
  external 23
  internal 42
Manual last number redial 27
Medical appliances 6
Menu
  end tone 45
  overview 21
  prompting 18
Message
  copying number to the directory 36
  deleting 36
  playing 36
Message key 1
  open list 32
  opening lists 27
Microphone 1
Missed calls 27, 28
Muting
  handset 24

N

Network provider preselection, automatic 29
Number
copying from directory 26
copying to directory 26
displaying caller's number (CLIP) 23
entering network mailbox number . . 39
entering with directory 26
saving in the directory 25
saving sender in the directory 33
setting for SMS centre 33

O

On/Off key 1
Order in directory 25

P

PABX
connecting base station 48
setting dialling mode 48
setting recall 48
SMS 33
switching temporarily to touch tone dialling 48
Pack contents 7
Paging 42
Pause 48
PIN change, system PIN 46
Pin connections 53
Playing back
announcement (answer machine) . . 35
message (answer machine) 36
Power consumption (base station) . . . 53
Preselection 29
cancelling 29
Protecting the phone against access . . 46

Q

Questions and answers 49

R

Range 8
Recall 48
time 48
Recall key 1
pause after 48
Reception booster, see Repeater
Recording time (answer machine) . . . 37
Registering (handset) 41
Remote operation 38
Repeater 46
Ringer
changing 44
setting melody 45, 46
setting volume 44, 46

S

Screen protection, see Screensaver
Screening a call 43
Screensaver 44
Searching in directory 25
Sending directory entry to handset . . 26
Service 49
Setting
date 13, 43
melody 46
melody (ringer) 45
time 13, 43
wake-up time 41
Setting up
handset 10
Shortcut 21
SMS 31
active send service centre 31
deleting 32
draft message list 31
forwarding 33
incoming message list 32
list 27
reading 32
replying to and forwarding 33
saving number 33
self help with error messages 34
to a PABX 33
troubleshooting 34
writing 54
SMS centre
changing number 33
setting 33
Snooze (alarm clock) 41
Specifications 52
Speed dial 26
Star key 1, 45
System settings 46

T

Talk key 1, 23
Telephone jack, pin connections 53
Telephone system
  setting pauses 48
Text message, see SMS
Touch tone dialling 48
Troubleshooting (SMS) 34

U

Unknown caller 23

V

Viewing the network mailbox report . . 39
Volume
  earpiece volume 44
  handset handsfree volume 44
  ringer 44, 46

W

Warning tone (battery) 45
Writing (SMS) 31
Writing and editing a text message . . . 54